


FILTERCOMM



HYDROSTATIC COOLANT FILTERS


DEEPFLOW

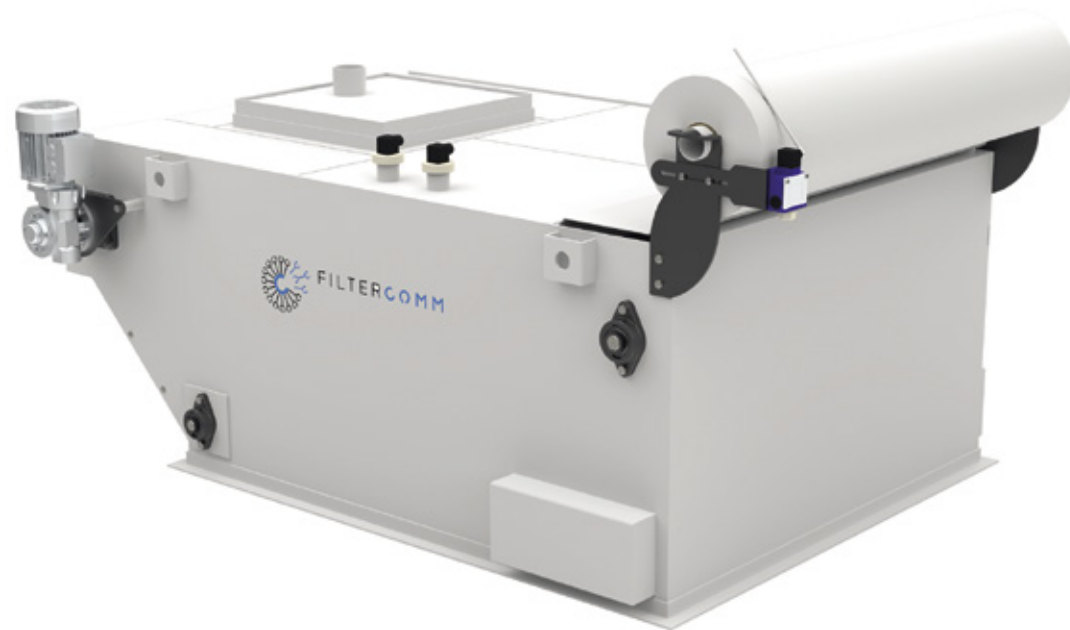


High efficiency gravity filters

Paper media hydrostatic filtration systems for treatment of large quantities of coolant in reduced space.

DEEPFLOW

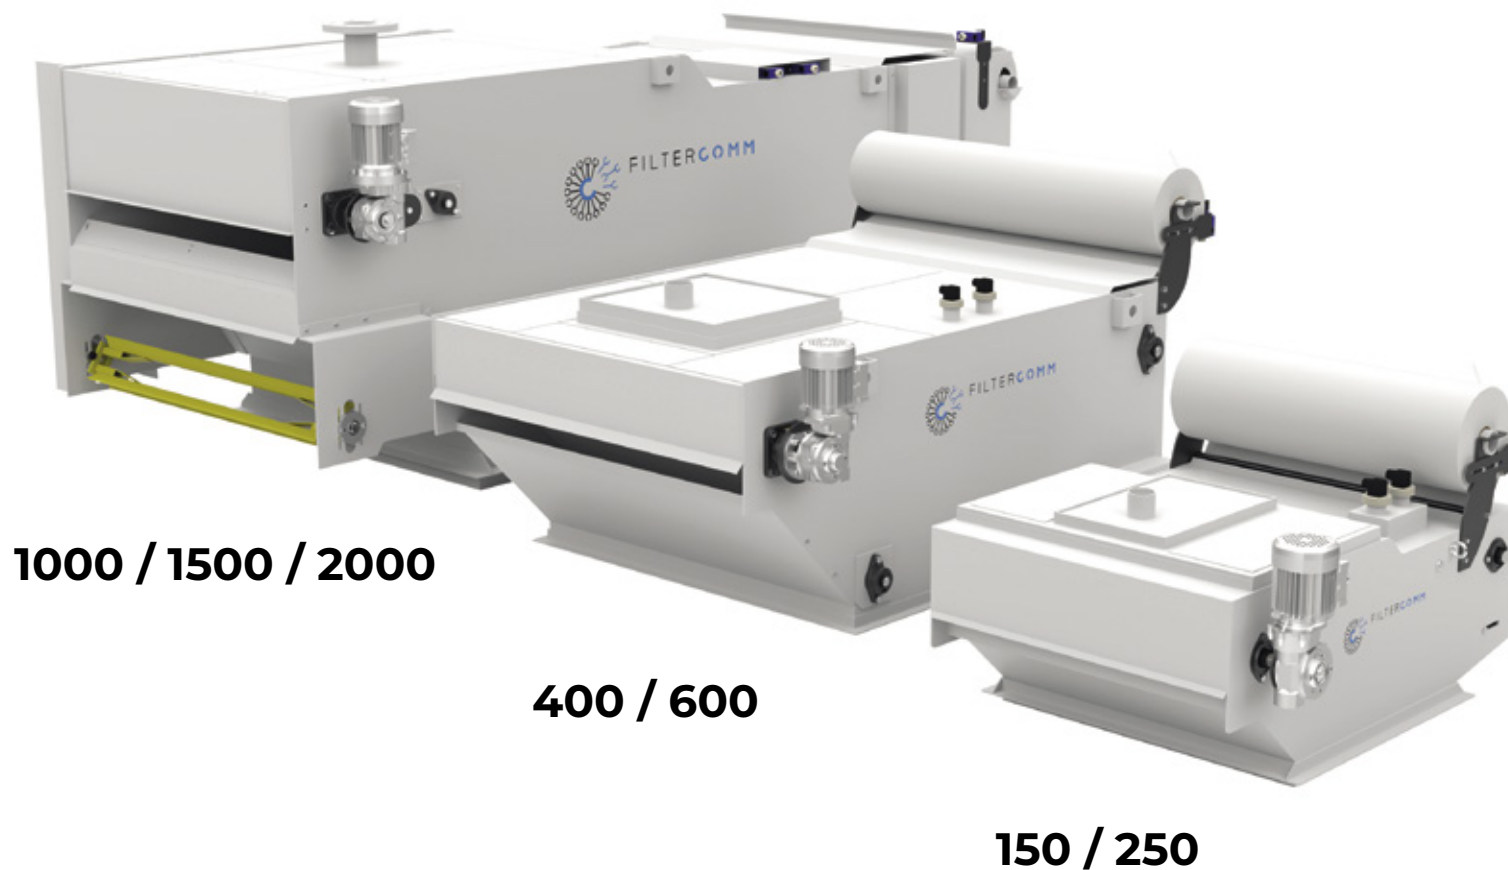



1

Dirty coolant entry:

The contaminated coolant is conveyed to the filter by gravity or pressure and passes through a **diffuser** which serves to **distribute the liquid on the underlying filter fabric** where the pollutants are retained.

2

Filtration process:

The pressure created by the large amount of coolant within the filter progressively creates a **compact layer of waste material on the fabric**, increasing the degree of filtration as well as reducing the consumption of filter media. When the fabric is completely clogged, the liquid level rises and lifts the float.

3


Filter media advancement:

The float starts **the gearmotor which rotates the chain on which the clogged fabric rests**. It is then automatically extracted and rewound (optional) and replaced by a portion of clean fabric, restoring the initial permeability and allowing the coolant to flow again.

4


Clean coolant exit:

The clean coolant is conveyed into a **collection tank** to be processed as required by the client.

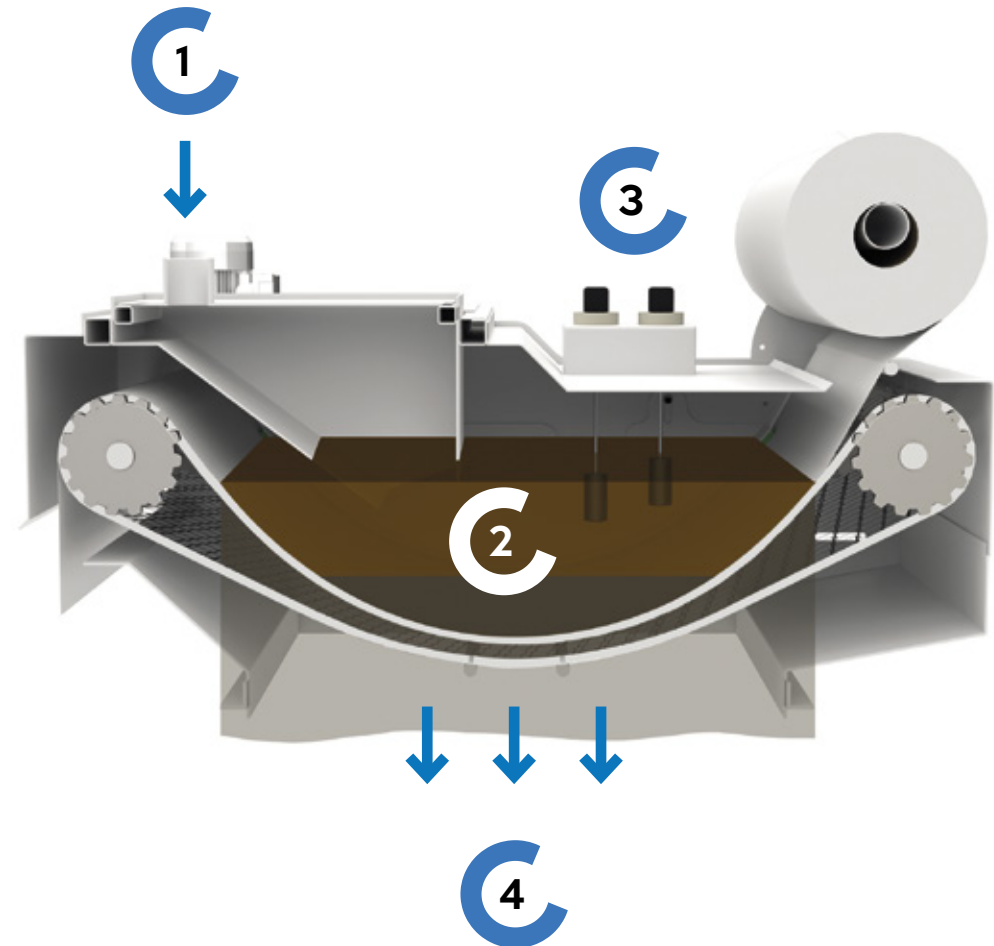



DEEPFLOW
OPTIONAL

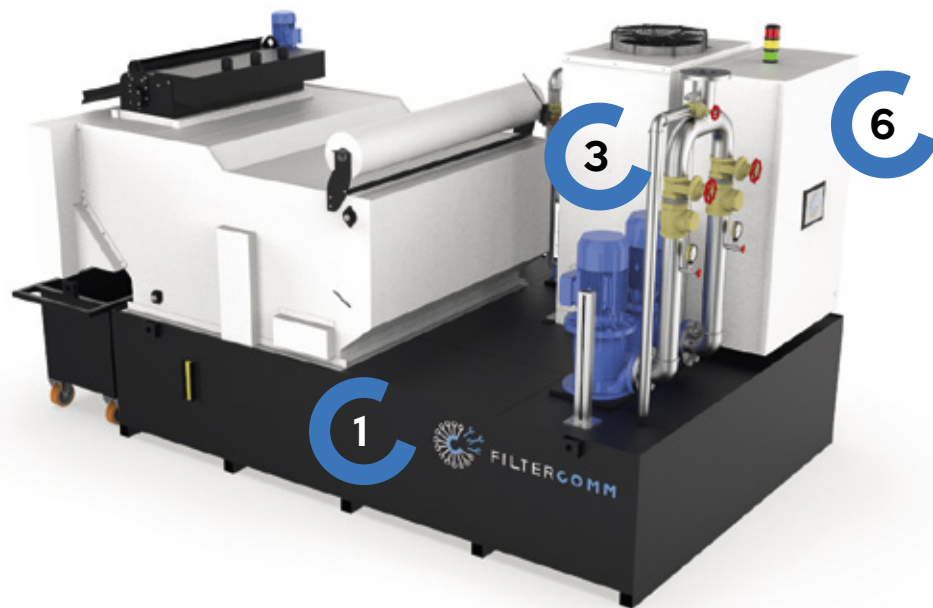

- ① Clean coolant collection tank
- ② MagDisk magnetic separator
- ③ Clean coolant transfer pumps

- ④ Chiller
- ⑤ Heat exchanger
- ⑥ Electrical cabinet with PLC



Single installation:



The Deepflow range can be installed on single machine tools.

Centralised solution:




Deepflow can also be installed as a centralisation to serve multiple machine tools simultaneously.




DEEPFLOW
TECHNICAL DETAILS

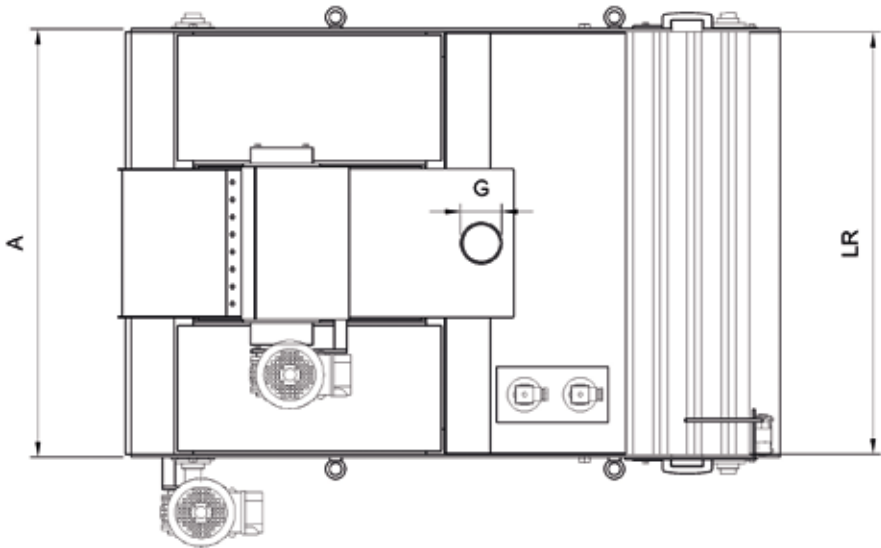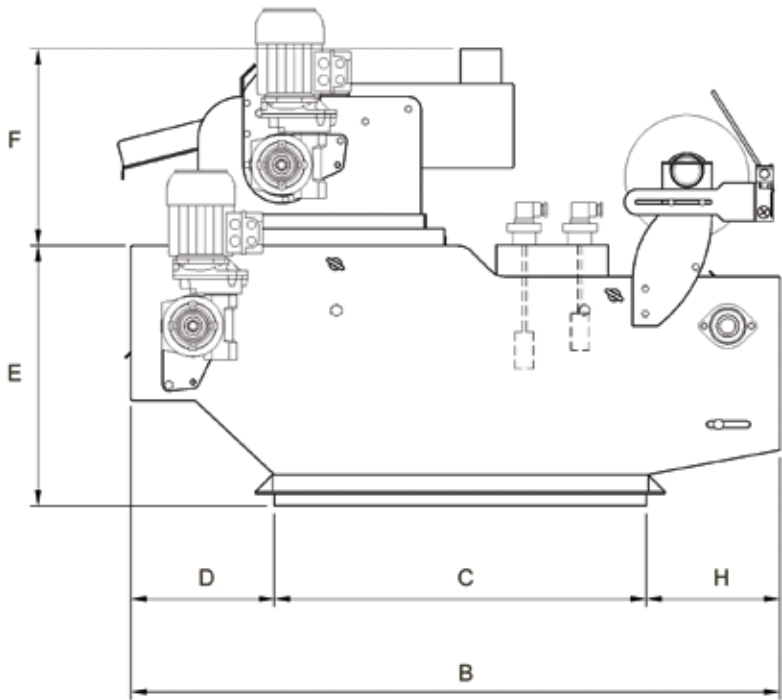

Deepflow	Max flowrate emulsion (l/m)	Max flowrate neat oil (l/m)	Weight (kg)	A	B	C	D	E	F	G	H	LR
150	160	80	120	690	1047	600	231	420	317	1" 1/2	215	680
250	260	130	150	990	1047	600	231	420	317	2"	215	980

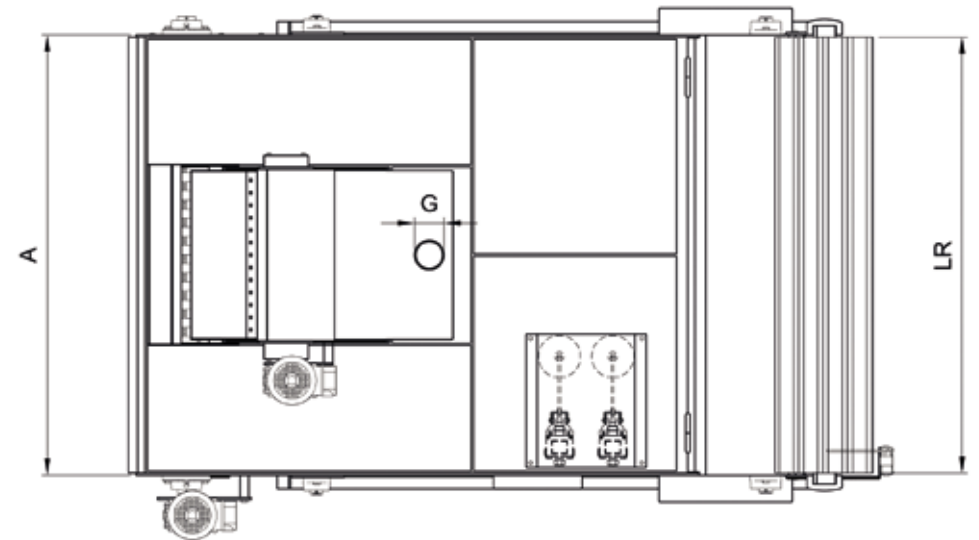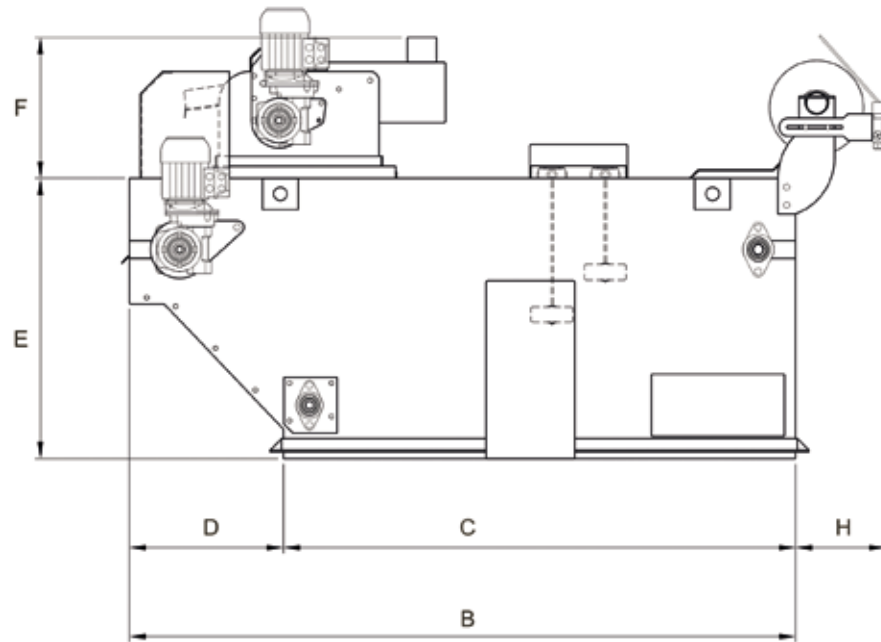

Deepflow	Max flowrate emulsion (l/m)	Max flowrate neat oil (l/m)	Weight (kg)	A	B	C	D	E	F	G	H	LR
400	400	200	250	690	1500	1153	347	630	317	2"	205	680
600	600	300	300	990	1500	1153	347	630	317	2" 1/2	205	980
1000	1000	500	500	990	1995	1290	525	1080	520	3"	340	980
1500	1500	750	700	1430	1995	1290	525	1080	520	3"	340	1420
2000	2000	1000	950	1430	2490	1830	560	1080	520	4"	340	1420

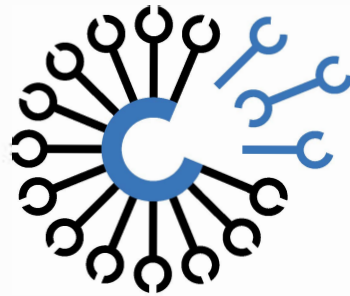

all in one.



**Engineered
Filtration, Inc.**

Po Box 1767 Dandridge, TN 37725- USA Phone: 512-827-3701

Web: www.engfilt.com

info@engfilt.net